






2411T  
Ø 99X99X128m



2414T  
Ø 179X99X128m



2417T  
Ø 259X99X128m




Simple and easy appearance, in line with contemporary aesthetic concept. The product has the structure and appearance design patent. The lamp body adopts high-pressure cast aluminum and aluminum alloy, the surface is coated with outdoor used powder, double anti-corrosion to extend service life. This lawn lamp series uses LED. High efficiency constant current driver, ensure the light source is maximum used.

### FIELDS OF APPLICATION


Office & Education, offices, open-plan offices, conference rooms, conference rooms, reception areas, counters, galleries, hotels, restaurants, living spaces

Item No.	Wattage	Lumen	Color Temperature	IP	volt	CRI	PF	Beam Angle
2411T-15	15W	100lm/W	3000k-4000K-6000K	Ip20	220V	90	0.9	15° / 24° / 36° / 60°
2411T-20	20W	100lm/W	3000k-4000K-6000K	Ip20	220V	90	0.9	15° / 24° / 36° / 60°
2411T-25	25W	100lm/W	3000k-4000K-6000K	Ip20	220V	90	0.9	15° / 24° / 36° / 60°
2414T-15	30W	100lm/W	3000k-4000K-6000K	Ip20	220V	90	0.9	15° / 24° / 36° / 60°
2414T-20	40W	100lm/W	3000k-4000K-6000K	Ip20	220V	90	0.9	15° / 24° / 36° / 60°
2414T-25	50W	100lm/W	3000k-4000K-6000K	Ip20	220V	90	0.9	15° / 24° / 36° / 60°
2417T-15	45W	100lm/W	3000k-4000K-6000K	Ip20	220V	90	0.9	15° / 24° / 36° / 60°
2417T-20	60W	100lm/W	3000k-4000K-6000K	Ip20	220V	90	0.9	15° / 24° / 36° / 60°
2417T-25	75W	100lm/W	3000k-4000K-6000K	Ip20	220V	90	0.9	15° / 24° / 36° / 60°

Relative spectral perception of brightness and melanopic effect  
Effect as a percentage

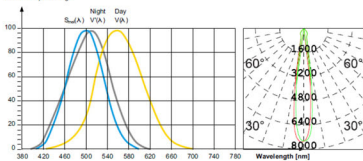

Explanation of the three curves:  
 S<sub>lm</sub>(λ) = Perception of brightness, daytime seeing with the cones  
 Y<sub>M</sub>(λ) = Nighttime seeing with the rods  
 S<sub>M</sub>(λ) = Melanopic suppression with the photosensitive ganglion cells

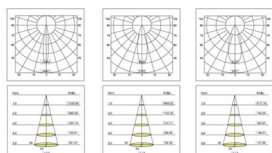

### Technical Details

Light Sour	Recessed
Driver	on/off, Dimmable Phase dimming, 1-10
Voltage	220-240V
Life Span	35000Hr
Temperature	ta=20°C-50°C
Diffuser	PMMA polycarbonate Pattern Lens

### Product Details

Finish	Black/White
Material	Aluminum
Application	-----
Warranty	3 YEARS
Class	-----



LED series wiring

