

Simple and easy appearance, in line with contemporary aesthetic concept. The product has the structure and appearance design patent. The lamp body adopts high-pressure cast aluminum and aluminum alloy, the surface is coated with outdoor used powder, double anti-corrosion to extend service life. This lawn lamp series uses LED. High efficiency constant current driver, ensure the light source is maximum used.

### FIELDS OF APPLICATION


Landscape, Facade, trees, palm trees, green areas

802401-70

Item No.	Wattage	Lumen	Color Temperature	IP	vollt	CRI	PF	Beam Angle
802401-70	1 W	151lm/W	2700K - 3000K	IP67	24 V	90	0.9	70°

### Relative spectral perception of brightness and melanic effect

Effect as a percentage

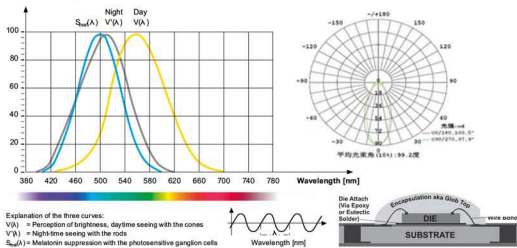

### Technical Details

Light Sour	Recessed
Driver	on/off, Dimmable
Voltage	Phase dimming, 1-10
Life Span	220-240V /24V
Temperature	35000Hr
Diffuser	$t_a=20^{\circ}\text{C}-50^{\circ}\text{C}$

### Product Details

Finish	Silver
Material	SS316 Frame
Application	Dia cast aluminum
Warranty	3 YEARS
Class	-----

LED life time		Operating time 1,000 h											
Lamp Lumen Maintenance Factor	1	10	20	30	40	50	60	70	80	90	100		
Lamp Survival Factor	1	1	1	1	1	1	1	1	0.99	0.99	0.99		
L80	50,000 h	LLMF	1	0.96	0.92	0.88	0.84	0.80	0.76	0.72	0.68	0.64	0.60
		LSF	1	1	1	1	1	1	0.99	0.99	0.99	0.99	0.98
L80	100,000 h	LLMF	1	0.98	0.96	0.94	0.92	0.90	0.88	0.86	0.84	0.82	0.80
		LSF	1	1	1	1	1	1	1	0.99	0.99	0.99	0.99

