

9W: - Ø 300-25-25mm

12W: - Ø 500-25-25mm

18W: - Ø 1000-25-25mm

IEC 62717 LED-modules for general lighting – Performance requirements
IEC 62722-2-1 Particular requirements for LED luminaires

High Lumen Efficacy 115lm/W

Body - Die cast aluminum housing with solvent free powder coating

Diffuser - PMMA polycarbonate pattern lens.

Glowing Wire Test - 850°

Temperature - $t_a=20\text{ }^\circ\text{C} \sim t_a \text{ max}=50\text{ }^\circ\text{C}$

Class - III



Simple and easy appearance, in line with contemporary aesthetic concept. The product has the structure and appearance design patent. The lamp body adopts high-pressure cast aluminum and aluminum alloy, the surface is coated with outdoor used powder, double anti-corrosion to extend service life. This lawn lamp series uses LED. High efficiency constant current driver, ensure the light source is maximum used.

FIELDS OF APPLICATION

Office & Education, offices, open-plan offices, conference rooms, conference rooms, reception areas, counters, galleries, hotels, restaurants, living spaces

Item No.	Wattage	Lumen	Color Temperature	IP	vollt	CRI	PF	Beam Angle
1911-30	9W	150l/W	3000-4000-6000K	ip65	24V	90	0.9	15°
1911-50	12W	150l/W	3000-4000-6000K	ip65	24V	90	0.9	15°
1911-100	18W	150l/W	3000-4000-6000K	ip65	24V	90	0.9	15°

Relative spectral perception of brightness and melanoptic effect
Effect as a percentage

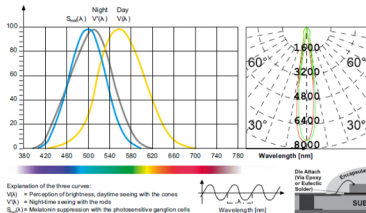

Technical Details

Light Sour	Surface
Driver	on/off, Dimmable
Voltage	Phase dimming, 1-10
Life Span	220-240V /24V
Temperature	35000Hr
Diffuser	$t_a=20\text{ }^\circ\text{C}-50\text{ }^\circ\text{C}$
	tempered glass

Product Details

Finish	Black
Material	aluminum
Application	-----
Warranty	3 YEARS
Class	-----

LED life time		Operating time 1.000 h											
Lamp Lumen Maintenance Factor		1	10	20	30	40	50	60	70	80	90	100	
Lamp Survival Factor		1	1	1	1	1	1	1	1	0.99	0.99	0.99	
L80	50.000 h	LLMF	1	0.96	0.92	0.88	0.84	0.80	0.76	0.72	0.68	0.64	0.60
		LSF	1	1	1	1	1	1	0.99	0.99	0.99	0.99	0.98
L80	100.000 h	LLMF	1	0.98	0.96	0.94	0.92	0.90	0.88	0.86	0.84	0.82	0.80
		LSF	1	1	1	1	1	1	1	0.99	0.99	0.99	0.99