



B151



Ø 50-312mm

B150



Ø 62-155mm

IEC 62717 LED-modules for general lighting – Performance requirements
IEC 62722-2-1 Particular requirements for LED luminaires

High Lumen Efficacy 115lm/W

Body - Die cast aluminum housing with solvent free powder coating

Diffuser - PMMA polycarbonate pattern lens.

Glowing Wire Test - 850°

Temperature - ta=20 °C ~ ta max=50 °C

Class - III



Simple and easy appearance, in line with contemporary aesthetic concept. The product has the structure and appearance design patent. The lamp body adopts high-pressure cast aluminum and aluminum alloy, the surface is coated with outdoor used powder, double anti-corrosion to extend service life. This lawn lamp series uses LED. High efficiency constant current driver, ensure the light source is maximum used.

FIELDS OF APPLICATION

Landscap , Facade , trees , palm trees , gree areas

Item No.	Wattage	Lumen	Color Temperature	Color
B150-BK	GU10 7W	151lm/W	2700 - 3000 - 4000 - 6000 k	Black
B150-WH	GU10 7W	151lm/W	2700 - 3000 - 4000 - 6000 k	White
B151-BK	2X GU10 7W	151lm/W	2700 - 3000 - 4000 - 6000 k	Black
B151-wh.	2X GU10 7W	151lm/W	2700 - 3000 - 4000 - 6000 k	White

Relative spectral perception of brightness and melanopic effect

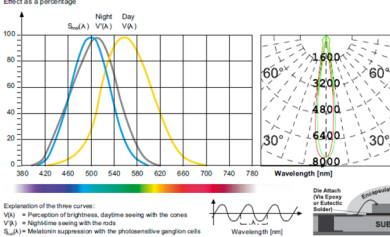

Technical Details

Light Sour	Wall light
Driver	on/off, Dimmable
Voltage	Phase dimming, 1-10
Life Span	220-240V /24V
Temperature	35000Hr
Diffuser	ta=20°C-50°C

Product Details

Finish	Black , white
Material	Die cast aluminum
Application	-----
Warranty	3 YEARS
Class	-----

LED life time		Operating time 1.000 h											
Lamp Lumen Maintenance Factor	Lamp Survival Factor	1	10	20	30	40	50	60	70	80	90	100	
L80	50.000 h	LLMF	1	0.96	0.92	0.88	0.84	0.80	0.76	0.72	0.68	0.64	0.60
		LSF	1	1	1	1	1	1	0.99	0.99	0.99	0.99	0.98
L80	100.000 h	LLMF	1	0.98	0.96	0.94	0.92	0.90	0.88	0.86	0.84	0.82	0.80
		LSF	1	1	1	1	1	1	1	0.99	0.99	0.99	0.99

