



## MAYAER



A - Ø 106-72mm 95mm

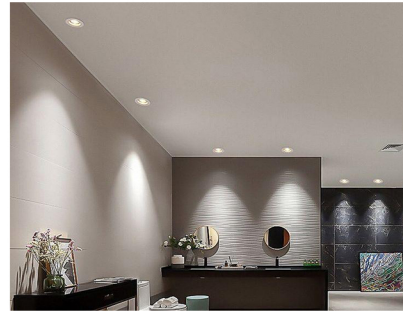


Simple and easy appearance, in line with contemporary aesthetic concept. The product has the structure and appearance design patent. The lamp body adopts high-pressure cast aluminum and aluminum alloy, the surface is coated with outdoor used powder, double anti-corrosion to extend service life. This lawn lamp series uses LED. High efficiency constant current driver, ensure the light source is maximum used.

### FIELDS OF APPLICATION

Office & Education, offices, open-plan offices, conference rooms, conference rooms, reception areas, counters, galleries, hotels, restaurants, living spaces

Item No.	Wattage	Lumen	Color Temperature	IP	CRI	PF	Beam Angle
122010302MAY	10W	115lm/W	2700K-3000K-4000K-6000K	IP65	90	0.9	36°
122012302MAY	12W	115lm/W	2700K-3000K-4000K-6000K	IP65	90	0.9	36°
122015302MAY	15W	115lm/W	2700K-3000K-4000K-6000K	IP65	90	0.9	36°
122020302MAY	20W	115lm/W	2700K-3000K-4000K-6000K	IP65	90	0.9	36°

Relative spectral perception of brightness and melanopic effect  
Effect as a percentage

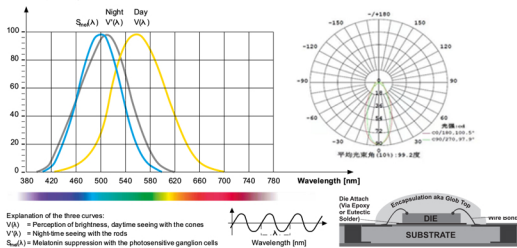

### Technical Details

Light Sour Spot light  
 Driver on/off, Dimmable  
 Voltage Phase dimming, 1-10, Dali  
 Life Span 220-240V /24V  
 Temperature 35000Hr  
 Diffuser ta=20°C-50°C

### Product Details

Finish White  
 Material aluminum  
 Application -----  
 Warranty 3 YEARS  
 Class -----

LED life time		Operating time 1,000 h											
Lamp Lumen Maintenance Factor	Lamp Survival Factor	1	10	20	30	40	50	60	70	80	90	100	
L80	50,000 h	LLMF	1	0.96	0.92	0.88	0.84	0.80	0.76	0.72	0.68	0.64	0.60
		LSF	1	1	1	1	1	1	0.99	0.99	0.99	0.99	0.98
L80	100,000 h	LLMF	1	0.98	0.96	0.94	0.92	0.90	0.88	0.86	0.84	0.82	0.80
		LSF	1	1	1	1	1	1	1	0.99	0.99	0.99	0.99

