


BIANCA



24W: Ø 64-80mm


Simple and easy appearance, in line with contemporary aesthetic concept. The product has the structure and appearance design patent. The lamp body adopts high-pressure cast aluminum and aluminum alloy, the surface is coated with outdoor used powder , double anti-corrosion to extend service life. This lawn lamp series uses LED. High efficiency constant current driver, ensure the light source is maximum used.

FIELDS OF APPLICATION

garden - landscape - building - facade , etc...

Item No.	Wattage	Lumen	Color Temperature	IP	vollt	CRI	PF	Beam Angle
92200630BIA	6W	115lm/W	2700K-3000K- 4000K-6000K	IP68	24 V	90	0.9	15°

Relative spectral perception of brightness and melanopic effect
Effect as a percentage

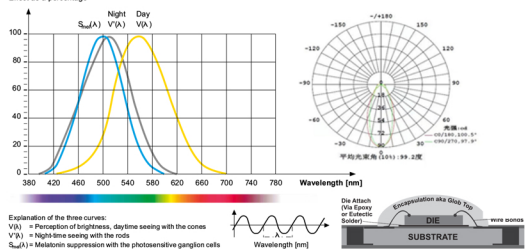

Technical Details

Light Sour	UP light
Driver	on/off, Dimmable Phase dimming, 1-10, Dali
Voltage	-----
Life Span	35000Hr
Temperature	ta=20°C-50°C
Diffuser	-----

Product Details

Finish	Silver
Material	SS316 frame Die cast aluminium body.
Application	-----
Warranty	3 YEARS
Class	-----

LED life time			Operating time 1.000 h										
Lamp Lumen Maintenance Factor			1	10	20	30	40	50	60	70	80	90	100
Lamp Survival Factor			1	1	1	1	1	1	1	1	0.99	0.99	0.99
L80	50.000 h	LLMF	1	0.96	0.92	0.88	0.84	0.80	0.76	0.72	0.68	0.64	0.60
		LSF	1	1	1	1	1	1	0.99	0.99	0.99	0.99	0.98
L80	100.000 h	LLMF	1	0.98	0.96	0.94	0.92	0.90	0.88	0.86	0.84	0.82	0.80
		LSF	1	1	1	1	1	1	1	0.99	0.99	0.99	0.99



LED series wiring



www.lambda-eu.com

OL2